



Speed-Guardian™ 4000 U

Maximum insulation, superior protection features,
ultimate speed and unique Duratec® insulated windows




Urethane panel sections

The 1-5/8" thick door panel is made of hot-dipped galvanized steel, enclosing a urethane core, providing optimal insulation for energy savings with an R-value of 13.6 and U-value of ≤ 0.5 (U-value of core and steel skin).



The innovative Micrograin™ exterior surface finish is a White Aluminum color (RAL 9006) and features a wave profile, producing attractive light and shadow effects.

Synthetic panel connectors provide an extremely smooth and quiet door operation, long service life and allow easy replacement of damaged panel sections.

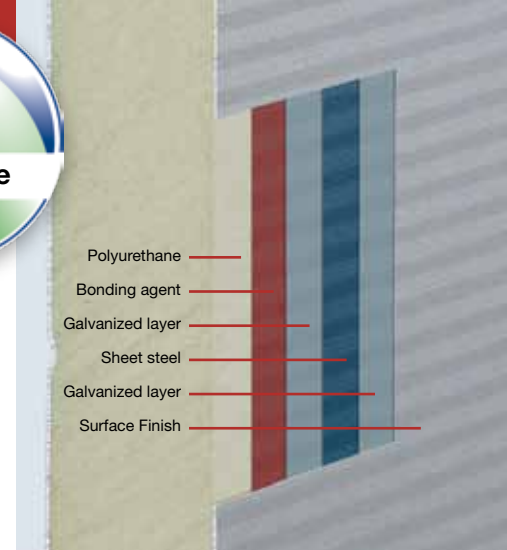

Built-in light grid

The standard light grid is integral with the guide track, making it less susceptible to damage by passing loads. Light beams shine across the opening and if a beam is interrupted, the door is automatically reversed.

This system enhances protection of personnel and goods and drastically reduces the likelihood of damage and repair to other parts of the door, saving on maintenance costs.




Duratec® insulated windows



The Duratec® insulated windows are coated with a special finish which prevents marks and scratches caused by cleaning. They retain their clear view after many cleanings and with heavy duty use, while keeping maintenance costs down.

Duratec® windows offer great insulation as the double pane construction substantially reduces the loss of conditioned air which ultimately contributes to energy savings.

Insulated pane reduces loss of conditioned air.

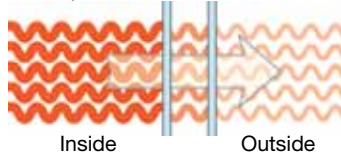

Duratec® window

Easy to clean and long-lasting

Conventional plastic window



Ask for our detailed brochure

