

# Product Data Sheet

Speed-Master® 2600 L



## Features



Pictured: The Speed-Master® 2600 L available in grey.

- Smart Start™ NXT, NEMA 4X programmable control box, with SmartControl™ M2M remote capability.
- Speed: Up to 36"/sec. open, 30"/sec. close.
- Patented, sectional design, able to self-realign displaced panels into guide tracks.
- LED Lite-Advance™ visual cycle indicating.
- In-line Light Curtain for non-contact protection of personnel and equipment.
- Emergency operation via chain hoist.
- Ultra tough, 2-ply reinforced puncture resistant Bulldog XT fabric panels.
- Available Clear PVC window panels.
- Panel Colors: Orange, Blue, Gray, Black.
- Panels joined with continuous, heavy-duty aluminum hinges, available with optional Windlocks for greater wind pressures.
- 5 & 2 year warranty protection plan. 5 yrs. motor/gearbox and panels. 2 yrs. other mech./elec.

Technical Data		Remark	
<b>Speed-Master® 2600 L</b> Flexible, high speed overhead rapid coiling door.			
Application	Exterior or Interior		Hood required for exterior mounted doors
Speed	Opening	Closing	Variable speed based on opening height
	Up to 36"/sec.	Up to 30"/sec.	
Control Box	Smart Start™ NXT (11-5/8"W x 15-3/4"H x 8-1/2"D)		Standard, NEMA 4X rated
Roll-up Technology	Hollow-core steel roll tube with precision-welded axles		Standard
<div style="display: flex; align-items: center;"> <div> <p>Door Construction</p> <p>Size Range</p> <p>Guide Track Profile</p> <p>Roll Tube Diameter</p> <p>Solid Panel(s) Height</p> <p>Vision Panel(s) Height</p> <p>Required Headroom</p> </div> </div> <p>Overhead Coiling</p>	Min. 14'-0" up-to 24'-0" wide Min. 16'-0" up-to 24'-0" high		Clear Passage Opening not to exceed 400 sqft.
	9-3/4" x 7-1/8"		(W x D)
	6-1/2"		Hollow core
	35-1/4"H, 1/8"Thk		--
	38"H, 1/8"Thk		2nd or 3rd panels only
	30-1/2" min.		--
Drive Mechanism	Direct-drive operator with chain lift mechanism		--
Counterbalance System	Not Required		--
Braking	Control box activated 24V DC brake		--
Cycleability / Maintenance	High / inspect per ea. 50,000 cycles or 6 mo. Individual curtain panels replaceable		Consult factory for details
Safety Features	Built-in light grid, chain hoist open/close		Standard
Resistance to Wind Load	DW ≤ 24'-0", 20.0 psf; 89.5 mph max. Windlocks recommended for heavy pressure apps.		DW = Door Width Per standard EN 12424, DASMA 108 Exposure B
Fire Resistance Rating	Non-rated, Non-conforming exit		Per 2012 IBC Section 1008
Warranty	5 & 2 years. Motor/gearbox and Panels (5), all other mech./elec. (2)		Standard
<b>Materials and Finishes</b>			
Guide Tracks & Covers	12-ga. HDG steel tracks, 16-ga. HDG steel covers		Zinc, Class G90 (0.9 oz. per SF)
Door Header Assembly, Roll Tube	12-ga. Hot-dipped galvanized steel		Zinc, Class G90
Weather Seals	Twin vinyl brush, jambs and lintel		--
Panel Hinges	30-ga. Clear Anodized Extruded Aluminum Profiles		--
Solid Door Panels	Abrasion resistant, 2-ply polyseter reinforced "Bulldog XT" PVC sheet, 2.8mm Thick, 90 oz./yd <sup>2</sup>		Color Availability: Blue, Orange, Gray, Black

# Product Data Sheet (Continued)




Speed-Master® 2600 L

Materials and Finishes (Continued)		Remark
Vision Door Panels	Abrasion resistant, transparent PVC sheet, 2.8mm Thick, 45 oz./yd <sup>2</sup>	Color Availability: Clear
Ventilation Door Panels (Screen)	Abrasion resistant, vinyl coated 1000 density polyester core yarn in warp and fill. 0.6mm Thick, 10.4 oz./yd <sup>2</sup>	Ventilation panel frame, extruded anod. aluminum Fabric Openness 46.9%
Electric Door Operator	Cast aluminum	--
Control Panel	Stainless steel, or baked-on polyester powder coat painted. Color RAL 7035 Light Gray	--
Hood and Motor Cover	16-ga. Hot-dipped galvanized steel	Zinc, Class G90 (0.9 oz. per SF)
Energy Analysis		
Visible Transmittance (Tvis)	0.83%	Per calc ANSI/NFRC 200-2014 (Clear Vision Panels)
Solar Heat Gain Coefficient (SHGC)	0.81%	Per calc ANSI/NFRC 200-2014 (Clear Vision Panels)
Thermal Resistance (R-value)	R 1.73	Per test EN 717-1, DASMA TDS-163 (Without Visions)
Heat Transfer Coefficient (U-value)	U 0.73	Per test EN 12667: 199997-11, DASMA TDS-105
Acoustic Insulation	STC 24, R <sub>w</sub> 21 dB	Per test EN 717-2, ASTM E90 (Without Visions)
LEED Credit	MRC2, MRC4, EQc5	USGBC® LEED v4
Electrical		
Electric Door Operator (Motor)	2.0 HP GfA Elektromaten F18	NEMA Type 3 / IP54
Operating Voltage	3 PH, 132v or 230v	--
Control Box	5 KW variable frequency drive rated for operating voltage	NEMA Type 4X / IP66, UL/CUL Listed
Standard Power Requirement	460vAC - 600vAC, 3 PH, 60 Hz	--
Full Load Amps	12.0 A	Operator
Disconnect	Fuse: 20 Amp, Class K	Supplied by Others

The Speed-Master® high speed, high cycle line of doors are widely installed in market applications ranging from automotive retail, food & beverage production & distribution, transit & airports, parking and general industry. The standard 8'-0" high light curtain is built into the guide tracks and provides a wall of protection for personnel and equipment at the doorway, as compared to other doors that use photocells. The heavy duty 12-gauge hot-dip galvanized steel guide tracks open for ease in re-setting the door when required.

Our Smart Start™ NXT Control Panel is designed NEMA 4X compliant. Updates include simplified wiring configuration, more powerful processing with fewer circuitry components as compared to HFCB control boxes. Plug-n-Play wiring improves accuracy and timeliness of installation on site.

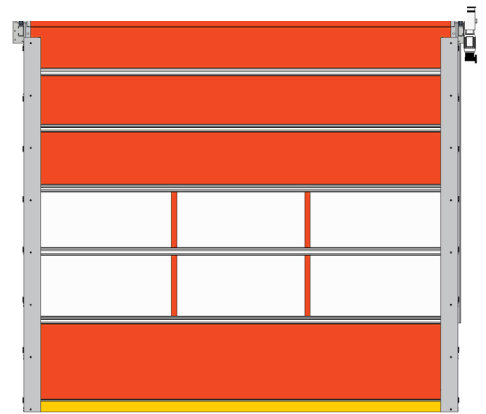

Speed-Master® High speed flexible doors provide excellent reliability and fast opening speeds.



Hörmann Flexon, LLC | Starpointe Business Park | 117 Starpointe Boulevard | Burgettstown, PA 15021-9506  
1-800-365-3667 | 724-385-9150 | Fax: 724-385-9151 | www.hormann-flexon.com | Email: sales2@hormann.us