


MODEL: SPEED GUARDIAN 5000ULP-42
 CUSTOMER: -
 ADDRESS: -
 CITY & STATE: -
 JOB: -
 LOCATION: -
 COMPANY: -

SIZE: DW=	DH=		
MOTOR LOCATION:	RIGHT	LEFT	
CONTROL BOX LOCATION:	RIGHT	LEFT	
VOLTAGE: ¹ 208V	¹ 230-240V	480V	² 575V
WIRING:	HARD WIRED	SMART START	
VISION AREA:			
# OF VISION PANELS:	-	STARTING AT	-"
# OF PERFORATED PANELS:	-	STARTING AT	-"
OPTIONS:			
3 BUTTON PUSH STATION	-		
INDUCTION LOOP	-		
MOTION DETECTOR	-		
NOTES:			


- 1.) STEP UP TRANSFORMER SUPPLIED FOR VOLTAGES UNDER 480VAC.
- 2.) STEP DOWN TRANSFORMER SUPPLIED FOR VOLTAGES OVER 480VAC.



ALL DIMENSIONS ARE IN INCHES.
 *FITTING CLEARANCE.

**SPACE REQUIRED TO FIT AND DISMANTLE THE OPERATOR.
 CONTROL BOX PROJECTION IS 6 INCHES.
 DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

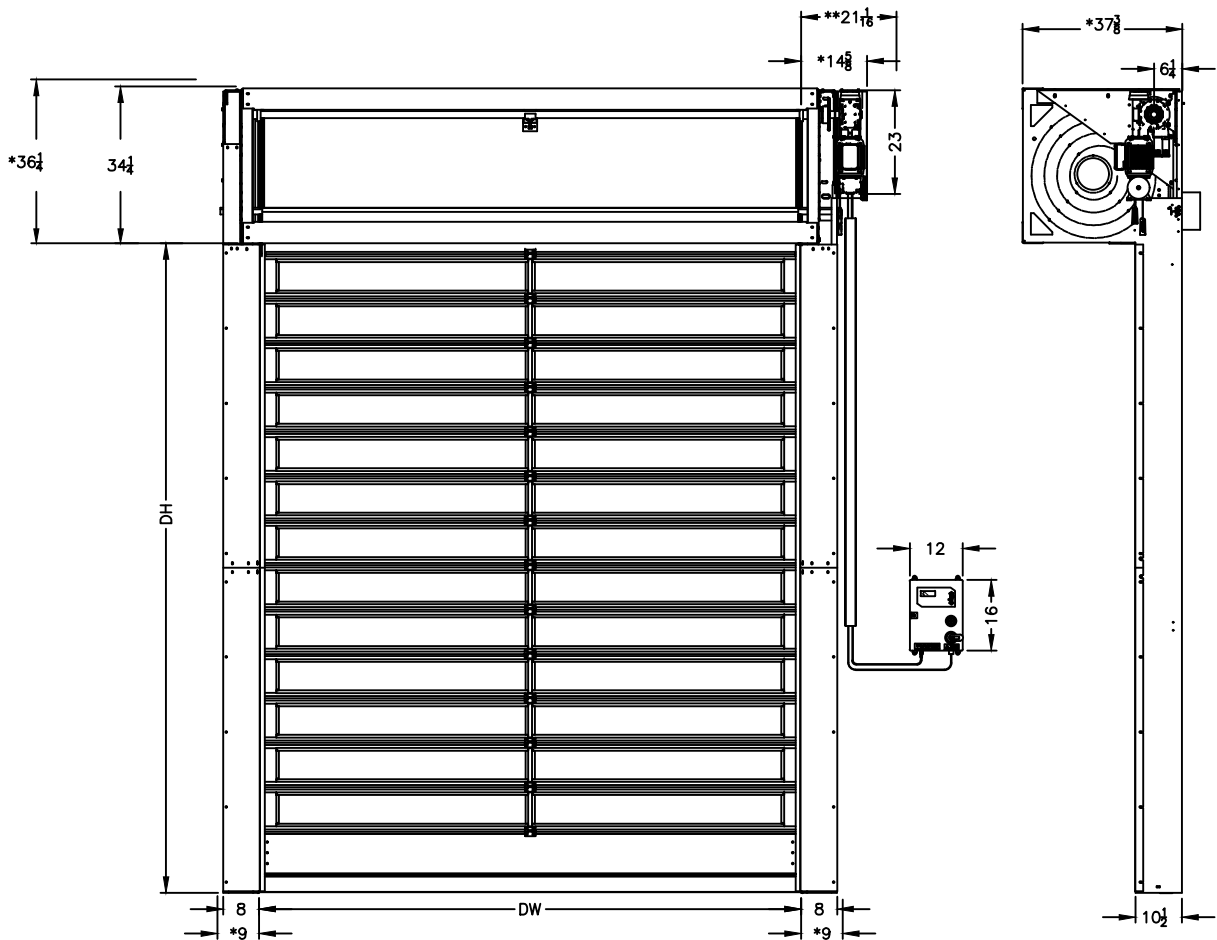

HÖRMANN FLEXON LLC
 STARPOINTE BUSINESS PARK
 117 STARPOINTE BOULEVARD
 BURGETTSTOWN, PA 15021-9506
 PH: 724.385.9150 FAX: 724.385.9151
www.hormann-flexon.com

TITLE: HIGH PERFORMANCE DOOR SPECIFICATIONS		
MODEL: SG5000ULP-42	PART #:	-
DRAWING #:	PAPER SIZE:	ANSI "B"
PAGE: 1 OF 1	SCALE:	N/A
QTY: -	ENGINEER: GJB	DRAWN: 12/21/2016