



MODEL: SC1500SEL-C ALUMINUM BOTTOM
 CUSTOMER: -
 ADDRESS: -
 CITY & STATE: -
 JOB: -
 LOCATION: -
 COMPANY: -

SIZE: DW= DH=
 MOTOR LOCATION: RIGHT LEFT
 CONTROL BOX LOCATION: RIGHT LEFT
 VOLTAGE: ¹208V 230-240V 480V ²575V
 WIRING: HARD WIRED SMART START
 VISION AREA:
 # OF VISION PANELS: - STARTING AT -"
 # OF PERFORATED PANELS: - STARTING AT -"
 OPTIONS:
 3 BUTTON PUSH STATION -
 INDUCTION LOOP -
 MOTION DETECTOR -
 NOTES:


- 1.) STEP UP TRANSFORMER SUPPLIED FOR VOLTAGES UNDER 230VAC.
- 2.) STEP DOWN TRANSFORMER SUPPLIED FOR VOLTAGES OVER 480VAC.



ALL DIMENSIONS ARE IN INCHES.
 *FITTING CLEARANCE.
 CONTROL BOX PROJECTION IS 6 INCHES.
 DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

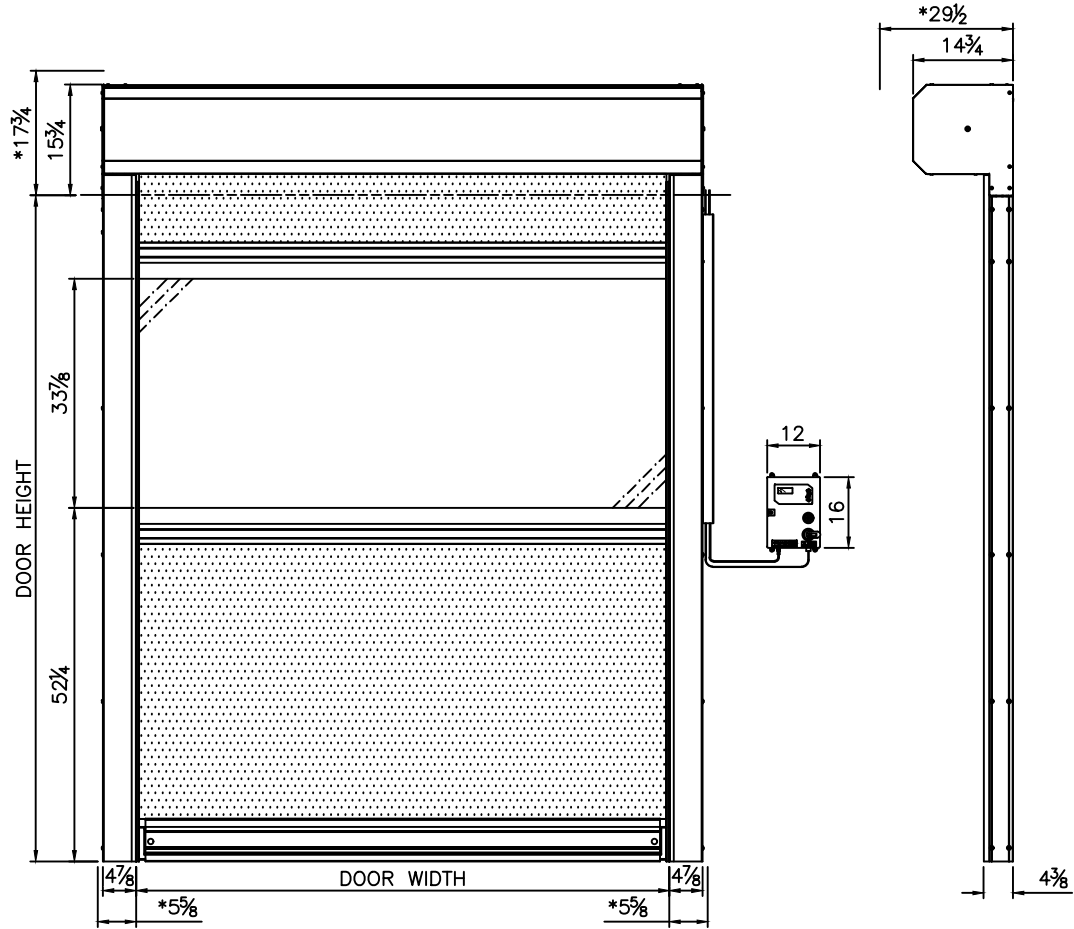

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

| | | | |
|---|---------------|--|--|
|  | | HÖRMANN FLEXON LLC STARPOINTE BUSINESS PARK 117 STARPOINTE BOULEVARD BURGETTSTOWN, PA 15021-9506 PH: 724.385.9150 FAX: 724.385.9151 www.hormann-flexon.com | |
| | | TITLE: HIGH PERFORMANCE DOOR SPECIFICATIONS | |
| MODEL: SC1500SEL-C | PART #: | | |
| DRAWING #: | PAPER SIZE: | | |
| PAGE: | SCALE: | | |
| QTY: | ENGINEER: GJB | DRAWN: 1-2-20. | |