


MODEL: SPEED GUARDIAN 5000U-42	
CUSTOMER: -	
ADDRESS: -	
CITY & STATE: -	
JOB: -	
LOCATION: -	
COMPANY: -	


SIZE: DW=		DH=	
MOTOR LOCATION:	RIGHT	LEFT	
CONTROL BOX LOCATION:	RIGHT	LEFT	
VOLTAGE: 208V	230-240V	360-480V	
WIRING:	HARD WIRED	SMART START	
VISION AREA:			
# OF VISION PANELS:	-	STARTING AT	-"
# OF PERFORATED PANELS:	-	STARTING AT	-"
OPTIONS:			
3 BUTTON PUSH STATION	-		
INDUCTION LOOP	-		
MOTION DETECTOR	-		
NOTES:			

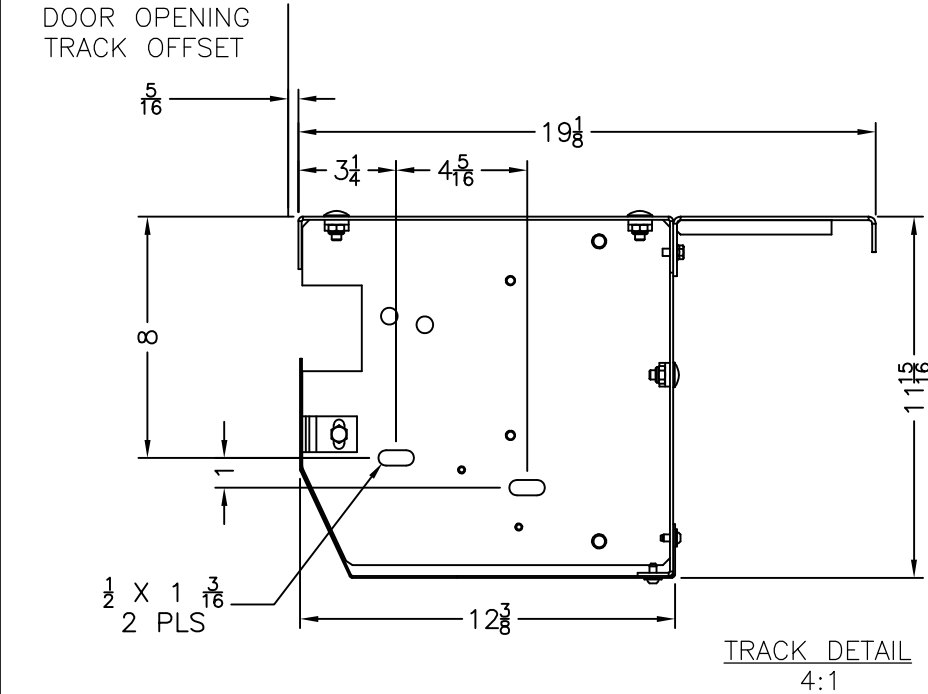

ALL DIMENSIONS ARE IN INCHES.  
\*FITTING CLEARANCE.

\*\*SPACE REQUIRED TO FIT AND DISMANTLE THE OPERATOR.  
CONTROL BOX PROJECTION IS 6 INCHES.  
DRAWING SHOWN RIGHT HAND, LEFT HAND OPPOSITE.

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

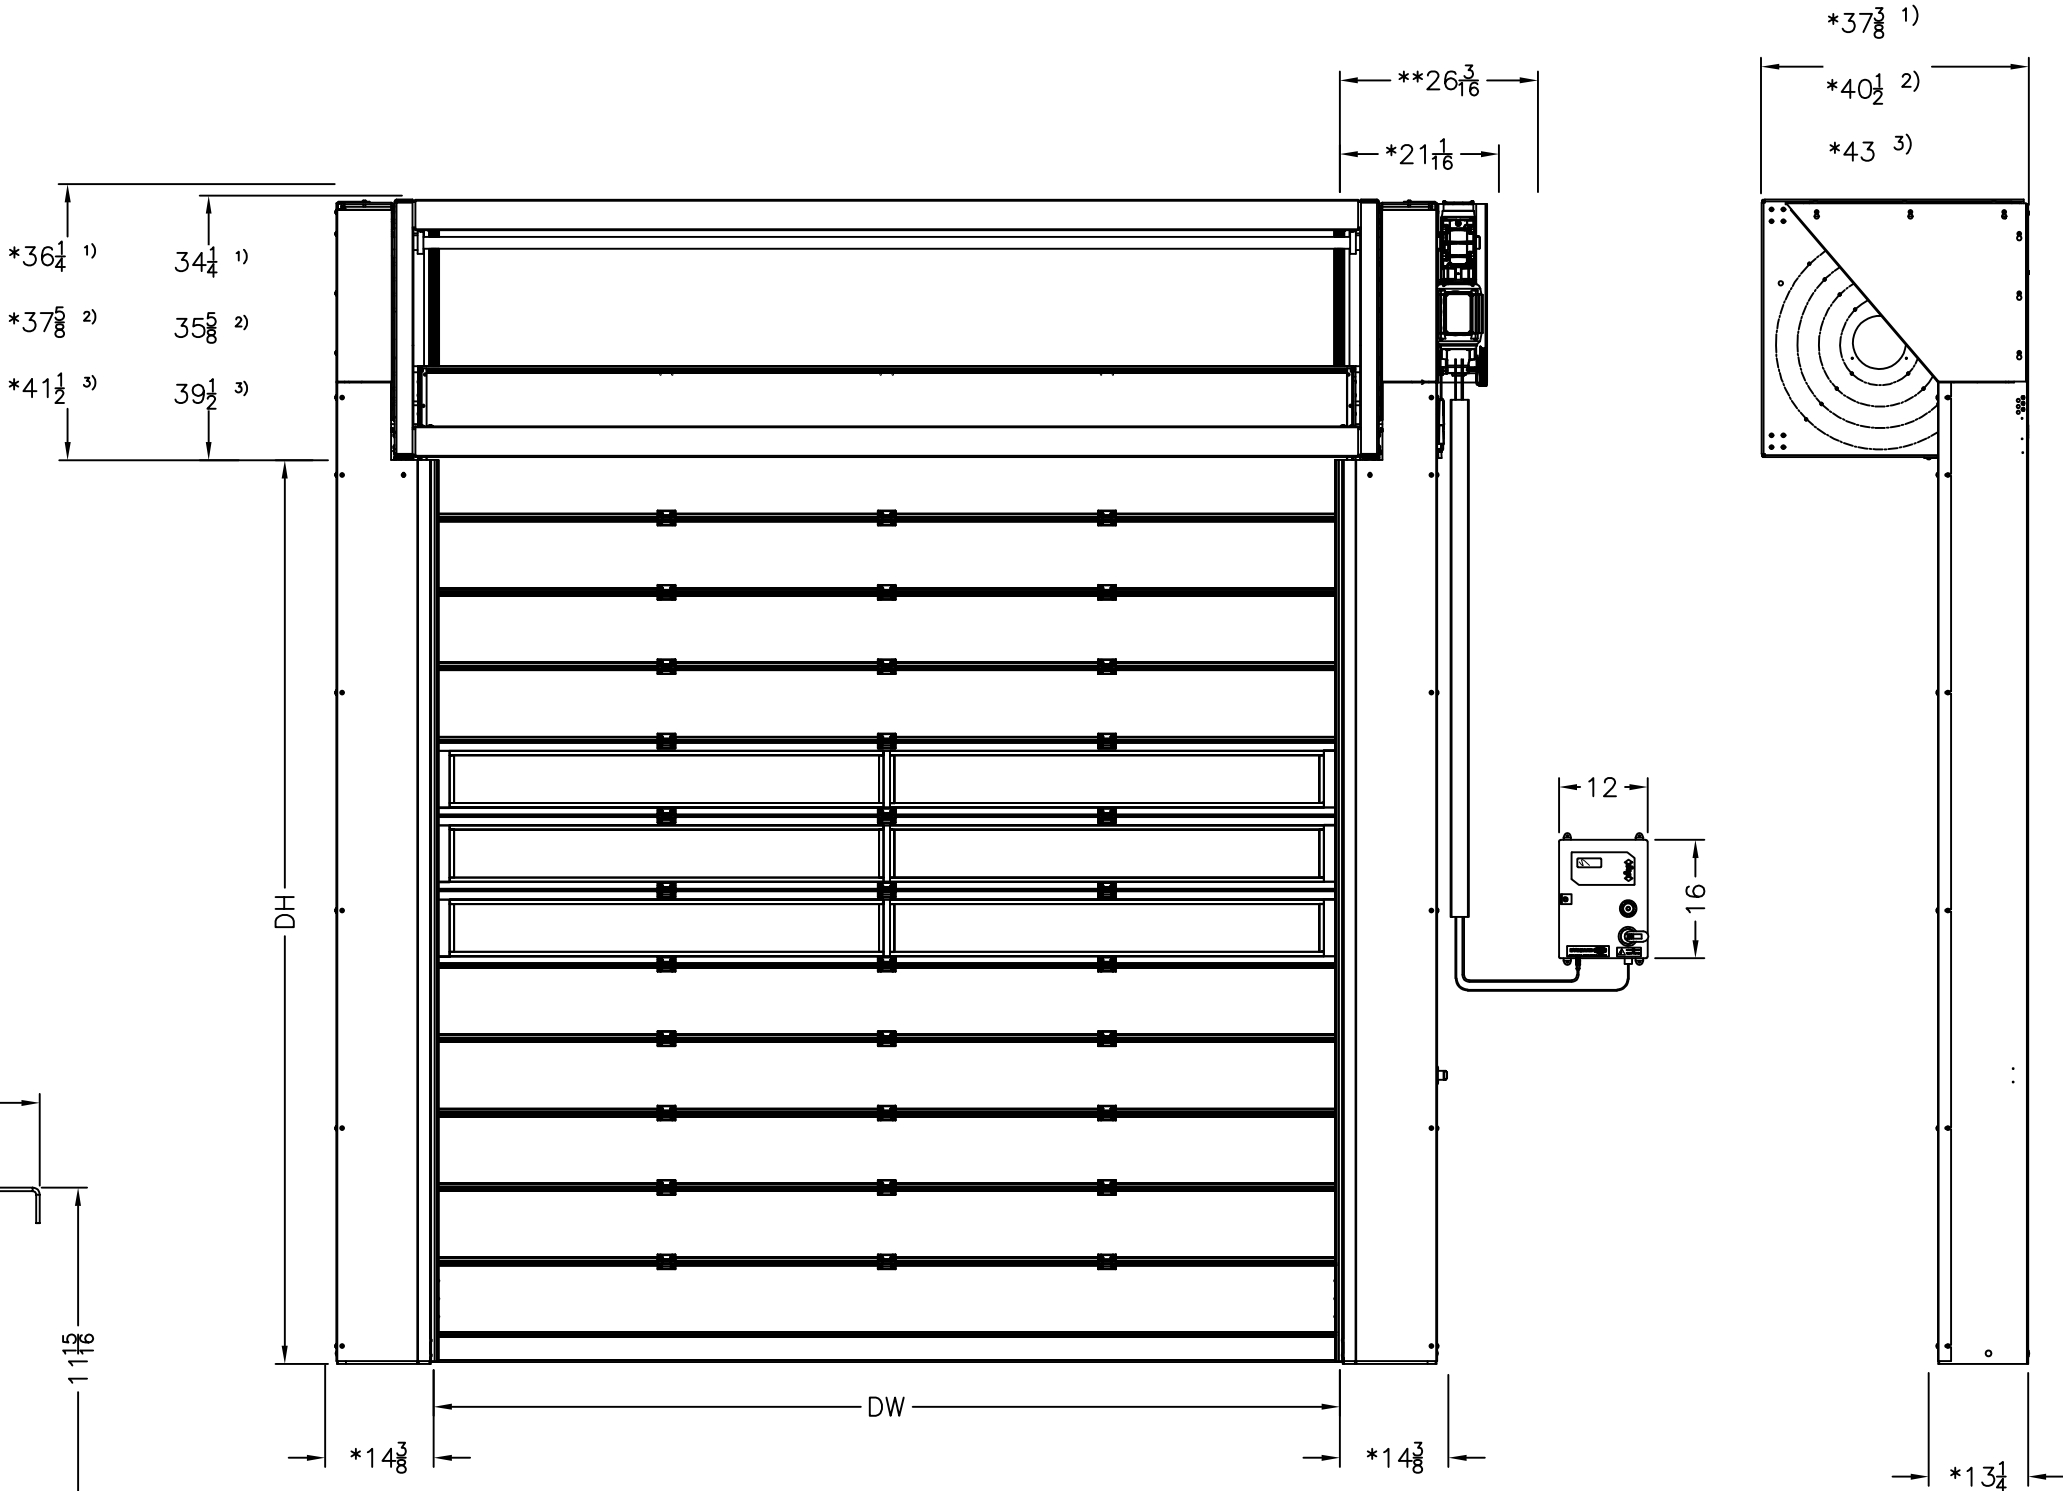

DW ≤ 256"		DW > 256"	
1)	DH ≤ 177"	1)	NA
2)	DH > 177"–≤216"	2)	NA
3)	DH > 216"–≤256"	3)	DH ≤ 192"

**HÖRMANN**  
117 STARPOINTE BOULEVARD  
BURGETTSTOWN, PA 15021–9506  
PH: +1 (800) 365–3667 FAX: 724.385.9151  
[www.hormann.us](http://www.hormann.us)

TITLE: HIGH PERFORMANCE DOOR SPECIFICATIONS	
MODEL: SG5000U–42	PART #: –
DRAWING #: –	PAPER SIZE: ANSI "B"
PAGE: 1 OF 1	SCALE: N/A
QTY: –	ENGINEER: GJB
DRAWN: 7/20/2021	